



VIEW

PRODUCT OVERVIEW





LEADER FOR A GOOD REASON

Since 1987, Thermokon is recognized worldwide for leveraging standards in intelligent buildings with engineering, innovation and quality "Made in Germany". Thanks to the development and production of sophisticated sensors and sensor systems we are creating an additional benefit for our customers all over the world. We focus on efficiency, sustainability and openness to new fields of technology as well as a close cooperation and thorough dialogue with our clients.

As a leader for innovation with a broad scope of applications we are continuously developing our portfolio further and offer decisive benefits with regards to product-related values, customised solutions and engineering. Our complete range of products is designed to energy-efficient buildings.




Made in Germany – Home in the world. With these goals in mind, our highly motivated 250 employees are working for your requests every day.

- » Clear focus on the best possible benefit for customers
- » Solution-oriented thinking and action
- » Achieving highest available technology and quality standards

We are glad to count manufacturers, system integrators, controller firms as well as distributors of the HVAC industry and building automation among our clients.

Thanks to our success we are an A-supplier for various customers.


A SUSTAINABLE AND ECONOMICAL PARTNERSHIP

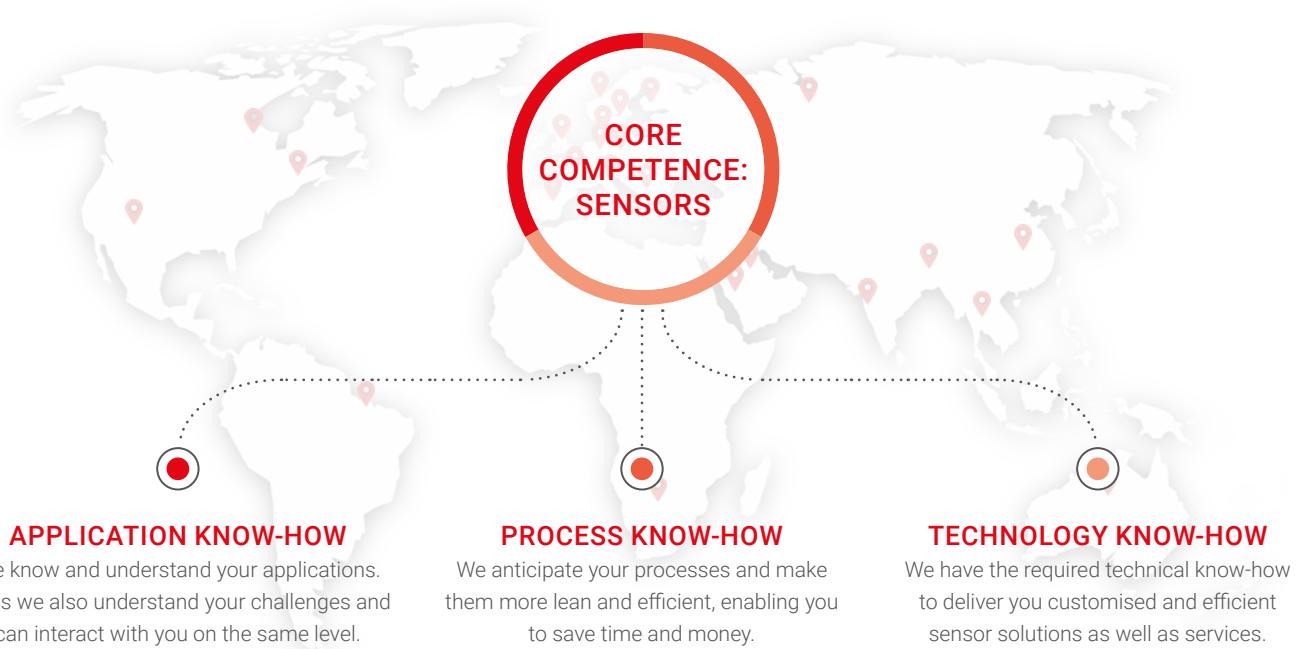



TEMPERATURE

High-quality materials, modern production processes, and many years of experience: We produce temperature sensors for various applications in buildings for heating, refrigeration and air conditioning systems.

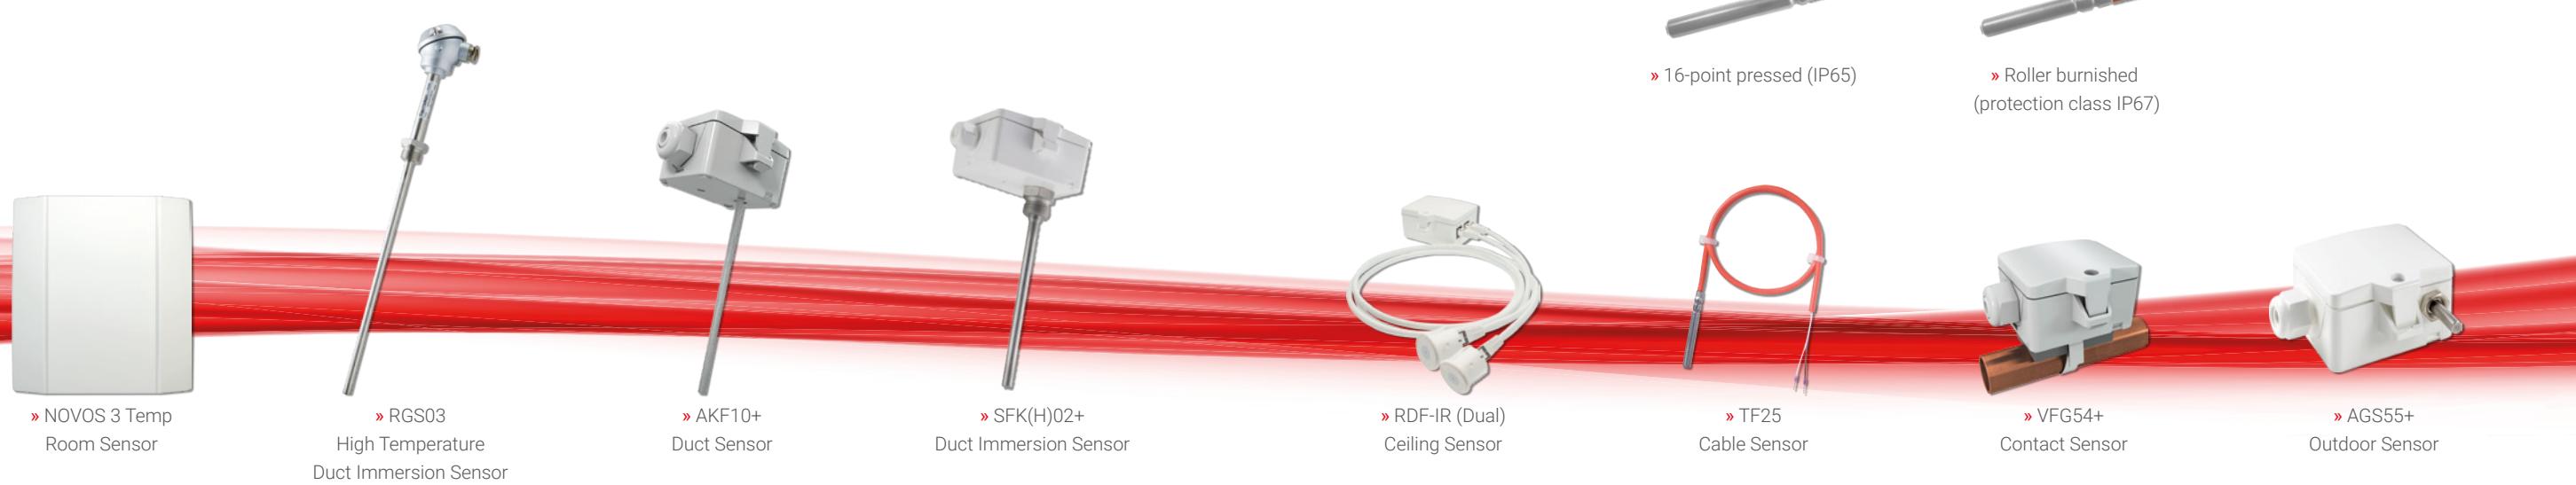

SENSOR PROTECTION: INNOVATIVE PRESSING AND ROLLING PROCESS

Ensuring the accuracy and reliability of our sensors is our highest priority. The proven **SI-Protection** for protection against corrosion damage, vibrations and measurement


inaccuracies will be supported in future by the innovative **16-point segment pressing (IP65)** or the optionally available **roller burnishing (protection class IP67)**.



» 16-point pressed (IP65)



» Roller burnished (protection class IP67)

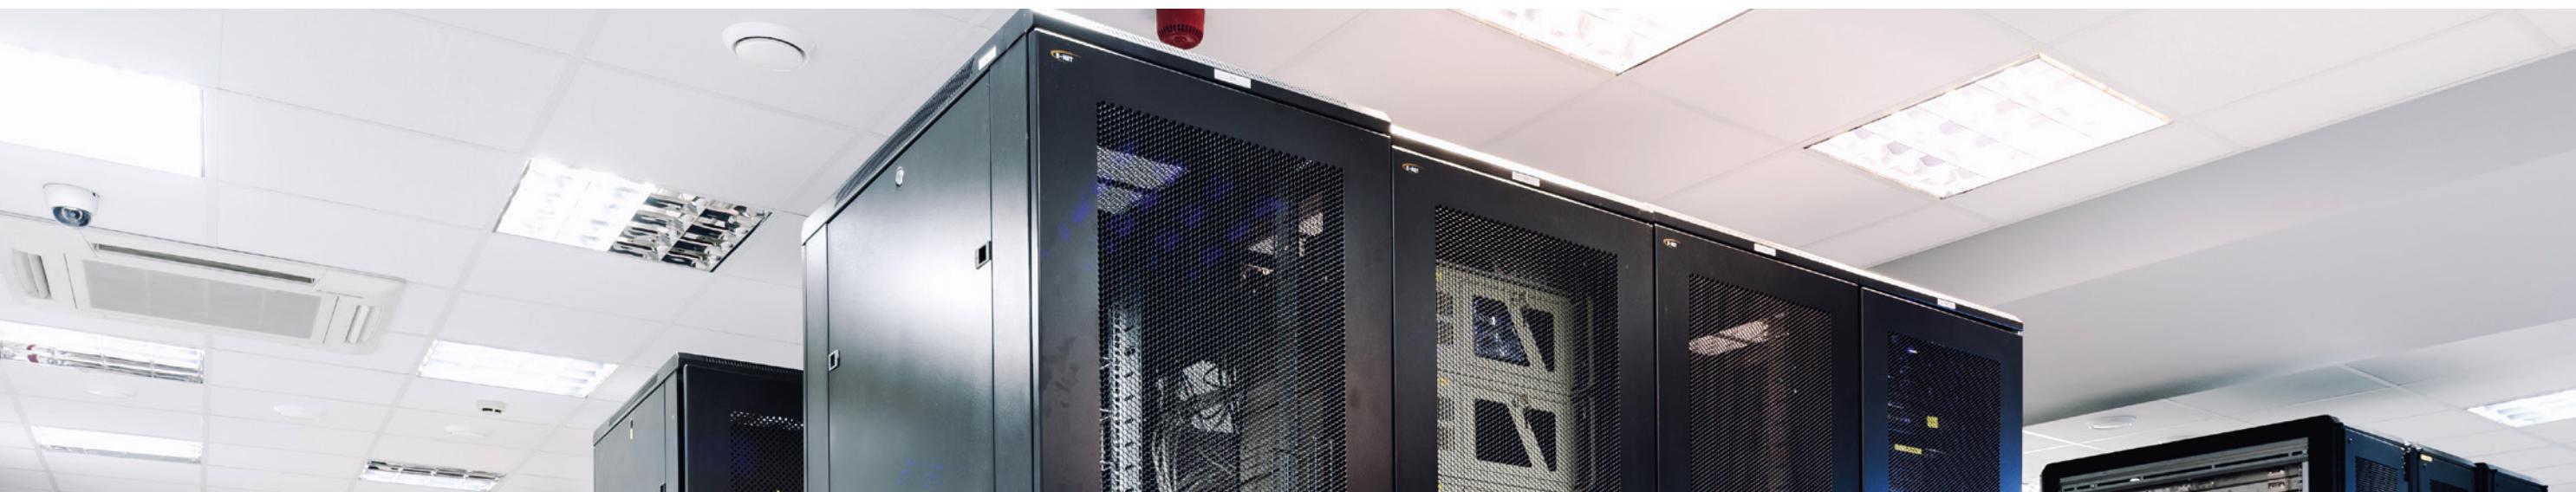

HUMIDITY

Humidity sensors for reliable detection of relative humidity and temperature in residential and commercial buildings, outdoor resp. in gaseous media of heating, ventilation and air conditioning systems.



» NOVOS 5 rH LCD
Room Sensor with LCD



» NOVOS 3 rH
Room Sensor



» WRF06 rH
Room Sensor



» FTK+
Duct Sensor

PRODUCT EXAMPLES


LEAKAGE SENSOR

Leakage sensor for the detection of liquid ingress (water leaks under air conditioners, pipe bursts...) With an electrolytic alternating voltage measurement, the leakage sensor measures point-like via two electrodes.

Thus, the leakage sensor detects water and liquid leaks along the entire sensor line. With a length of up to 30 m, even larger areas can be covered.



» LS02+ flex
Leakage Sensor




» WK02+
Condensation Sensor



AIR QUALITY (CO₂, VOC, Temp*, rH*)

CO₂ and VOC sensors allow for individual and demand-controlled supply of fresh air. In modern buildings the use of these sensors is essential in creating energy savings and the comfort levels for everyday living and working conditions.

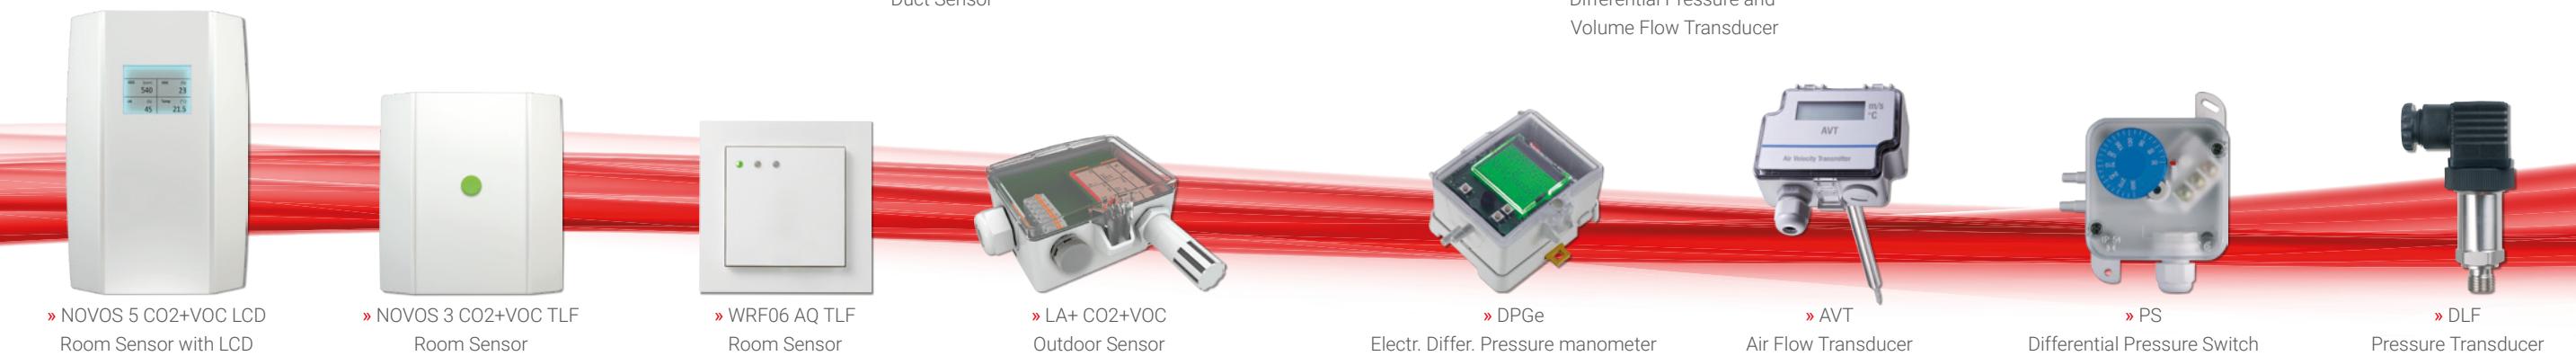

*OPTION



LIGHT AND MOTION

Our intelligent sensing allows an increase in physical and emotional well-being of people in the room. Motion and brightness are detected reliably: For individual, comfortable and increased energy-savings.



1

» MDS
Ceiling Multi Sensor



2

» WRF04I
Surface Mount Room Motion Sensor



3

» WRF06I
Flush Mount Room Motion Sensor



4

» RDI
Ceiling Motion Sensor



» LDF+
Ceiling Light Sensor



» Li65+
Outdoor Light Sensor



enocean®

KNX®

LON
LOCAL OPERATING NETWORK

Modbus

ASME BACnet

ROOM OPERATING UNITS

Our room operating units are designed for an integrated operation of HVAC, lighting and blinds to increase energy efficiency. In addition, up to 4 measuring values can be read through one device: temperature, humidity, CO2 and VOC. A variety of precious designs and sophisticated state-of-the-art technologies are available.



» thanos EVO Design

Touch Room Operating Unit with Design Frame



» thanos EVO
Touch Room Operating Unit



» NOVOS Touch Design
Touch Room Operating Unit



» NOVOS 7 Design
Room Operating Unit



» JOY
Fancoil Thermostat
Room Thermostat



» LCR Touch
Room Operating Unit



» NOVOS 5 x LCD
Room Operating Unit




» NOVOS 3 x
Room Operating Unit



» WRF06 LCD
Room Operating Unit



» WRF07 P3T3D
Room Operating Unit

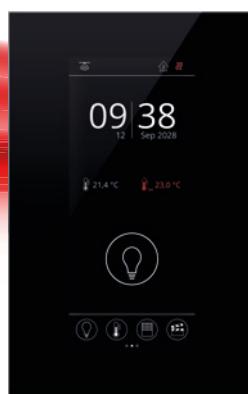

thanos EVO



NOVOS Touch



NOVOS 7



NOVOS 5 x



NOVOS 5 LCD



NOVOS 3 x (EPD)



NOVOS 3 SR CO2

ADVANTAGES AND HIGHLIGHTS

thanos EVO / NOVOS Touch

- » Controlling room climate, lights and shutters
- » Individually configurable scenes
- » Up to four integrated sensors (temperature, relative humidity, CO2 and VOC)
- » Clear visualization of values with trends and traffic light indication (TLF)
- » 4,8" Touchscreen, glass surface
- » Different enclosure colours available:
thanos EVO: white, black
 Optionally available with design frames in brushed aluminum (silver, graphite, anthracite, gold)
NOVOS Touch: white, black
- » Interface:
 BACnet MS/TP, Casambi, KNX or RS485 Modbus

NOVOS 7

- » Controlling room climate, lights and shutters
- » Individually configurable scenes
- » Up to four integrated sensors (temperature, relative humidity, CO2 and VOC)
- » Clear visualization of values with trends and traffic light indication
- » 3,5" TFT display, push-and-rotary switch, four user defined buttons
- » Different enclosure colours available:
 white, black
- » Interface:
 BACnet MS/TP, Casambi, KNX or RS485 Modbus

NOVOS 5 x / NOVOS 5

- » Up to four integrated sensors (temperature, relative humidity, CO2 and VOC)
- » Outputs:
 passive (NOVOS 5 x), active (0..10 V | 4..20 mA), BACnet MS/TP or RS485 Modbus
- » **NOVOS 5 x:**
 Available with setpoint adjuster, fan stage adjustment and/or button with integrated RGB LED
- » **NOVOS 5 x:**
 Optionally available with RGB display

NOVOS 3 x / NOVOS 3


- » Up to four integrated sensors (temperature, relative humidity, CO2 and VOC)
- » Outputs:
 passive, active (0..10 V | 4..20 mA), BACnet MS/TP or RS485 Modbus
- » Available with EnOcean® or LoRaWAN® radio interface
- » Optionally available with ePaper display (EPD)
- » **NOVOS 3 x:**
 Available with setpoint adjuster and/or button with integrated RGB LED

passive | 0..10 V | 4..20 mA

BACnet

KNX

Modbus

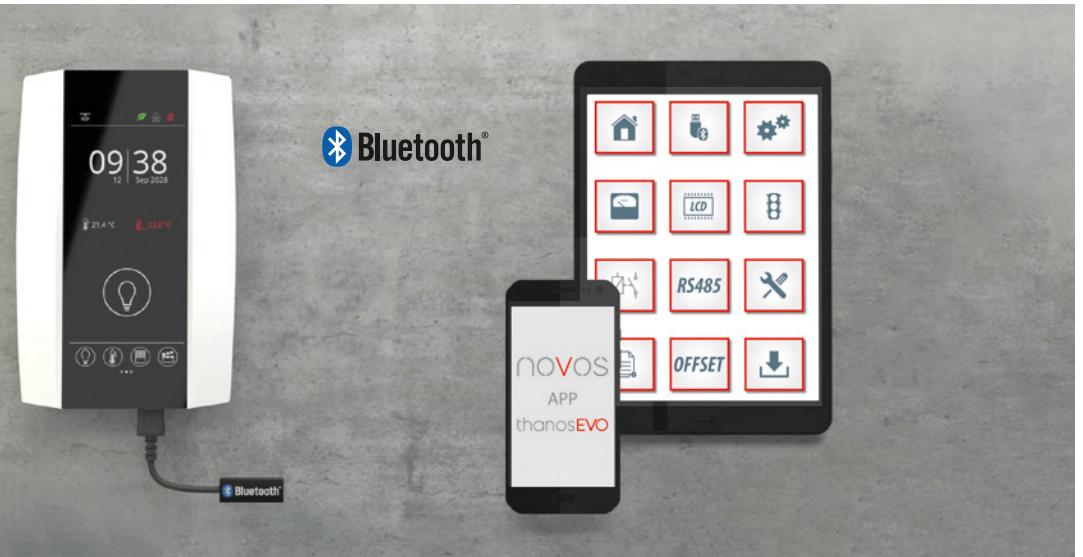



EASY CONFIGURATION VIA APP

Although every thanos EVO and NOVOS will come with a standard configuration that matches the majority of typical applications in room automation, the devices can be further customised with an individual configuration to suit also complex applications by means of the new app, which also simplifies the integration.

Additionally, each device can be customised post-integration to further extend the functionality to suit new requirements – from changing measuring ranges to configuration of displayed values (e.g. setpoints and fan stages), adjustment of offset values or adjusting thresholds for the traffic light indication.

The communication between the thanos EVO / NOVOS devices and a mobile end device is enabled by a Bluetooth® dongle, that is connected temporarily to the device.

- » Individual configuration of output signals
- » Adjustment of display features and values
- » Setting individual measuring ranges and maintenance intervals
- » Parameterisation of live-zero signals (e.g. 1..10 V etc.)
- » Subsequent setting of offset values to compensate external temperature influencing factors
- » Modbus address offset (extendable up to 247 addresses)

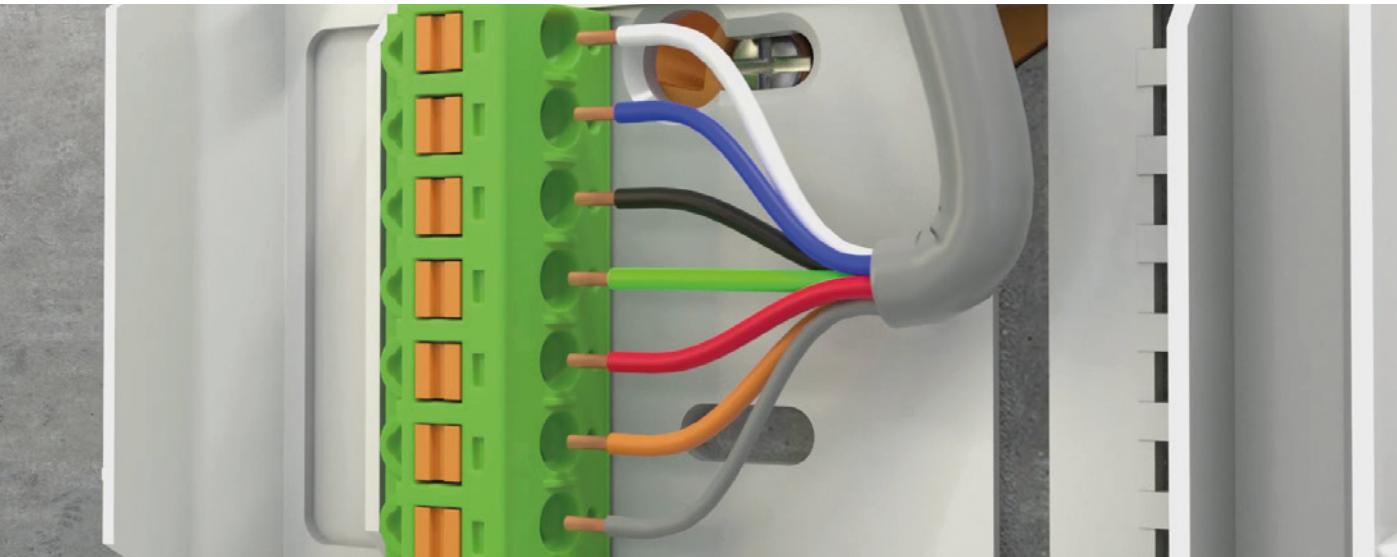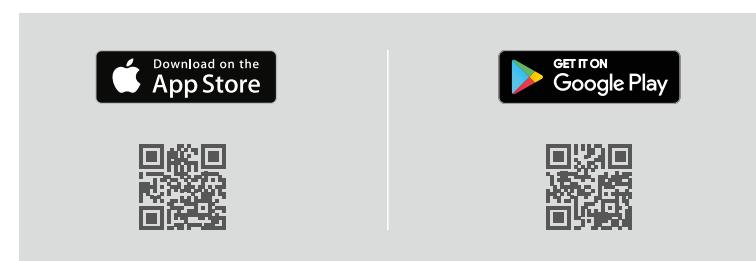

HIGHLIGHTS

Large vents for an optimized air flow inside the enclosure

Safety screw preventing unauthorized access

Micro-USB connector for configuration via app


Integrated channel for temperature sensitive sensors

Multiple screw holes to comply with different international flush/back boxes or surface mounting

Terminal for easy & quick wiring

Breakaway covers for cable entry in case of surface mounting

Large aperture for cabling





JOY – MULTIFUNCTION WITH APPEALING DESIGN

Appealing design, touch sensitive operation, different communication options to adapt to all building infrastructures: JOY provides efficient and comfortable climate control in room applications.

The visual aspect equals a slimline housing, scratch-proof glass touch interface, exclusive stainless steel power button, large and clear backlit display.

The different models (BUS, standalone, wireless) and types provide flexible building infrastructures meeting customer's requirements and integration into the existing BMS.

Human interaction and integration into the BMS, the JOY is easy to configure and control making it a JOYful experience for users as well as integrators to work with.



JOY FANCOIL



JOY HEATING/COOLING

ONE PRODUCT – 5 OPTIONS

» **JOY FANCOIL 5DO**
5x normally open contact (for heating/cooling and 3x fan stages), 3x input (2x universal, 1x change-over 230 V)

» **JOY FANCOIL A02DO**
2x normally open contact (heating/cooling), 1x 0..10 V output (for control of an EC fan), 3x input (2x universal, 1x change-over 230 V)

» **JOY FANCOIL 3AO**
3x 0..10 V output (for control of an EC fan or 6-way valve and for heating/cooling)

» **JOY HEATING/COOLING A02DO**
2x normally open contact (for heating/cooling), 1x 0..10 V output (for 6-way valves)

» **JOY HEATING/COOLING 3AO**
3x 0..10 V output (for control of an EC fan and heating/cooling)

TECHNICAL HIGHLIGHTS

- » Smart and flat high-quality design
- » Various types provide high application flexibility
- » Easy configuration
- » Available with EasySens® radio
- » Optional connection of an external temperature sensor for change-over applications
- » Scheduler included for adapting to most different user profiles
- » Integration into BMS (BACnet | EnOcean | Modbus)
- » Integrated ECO function for high energy efficiency

FURTHER INFORMATION
THERMOKON.DE/EN-GB/HIGHLIGHTS/JOY






GENERAL INFORMATION

Long Range Wide Area Network – short LoRaWAN® – is a radio technology that is capable of transmitting data over a long distance and even from remote and hard-to-reach locations in an energy-efficient, cost-effective and secure manner. Due to the low energy consumption, the batteries of the sensors are extremely durable and can last for several years.

LoRaWAN® uses the so-called ISM frequency band around 868 MHz in Europe, for which no licence fees and no cellular costs are incurred. LoRaWAN® is heavily involved in the development of so-called „smart cities“. In Germany for example, cities and municipalities in particular are building a sustainable and process-optimised infrastructure for building security and monitoring or controlling street lighting.

In Switzerland, France and the Netherlands, telecommunications providers operate a nationwide network of gateways. In addition to the public networks, companies can also set up their own networks (private networks).

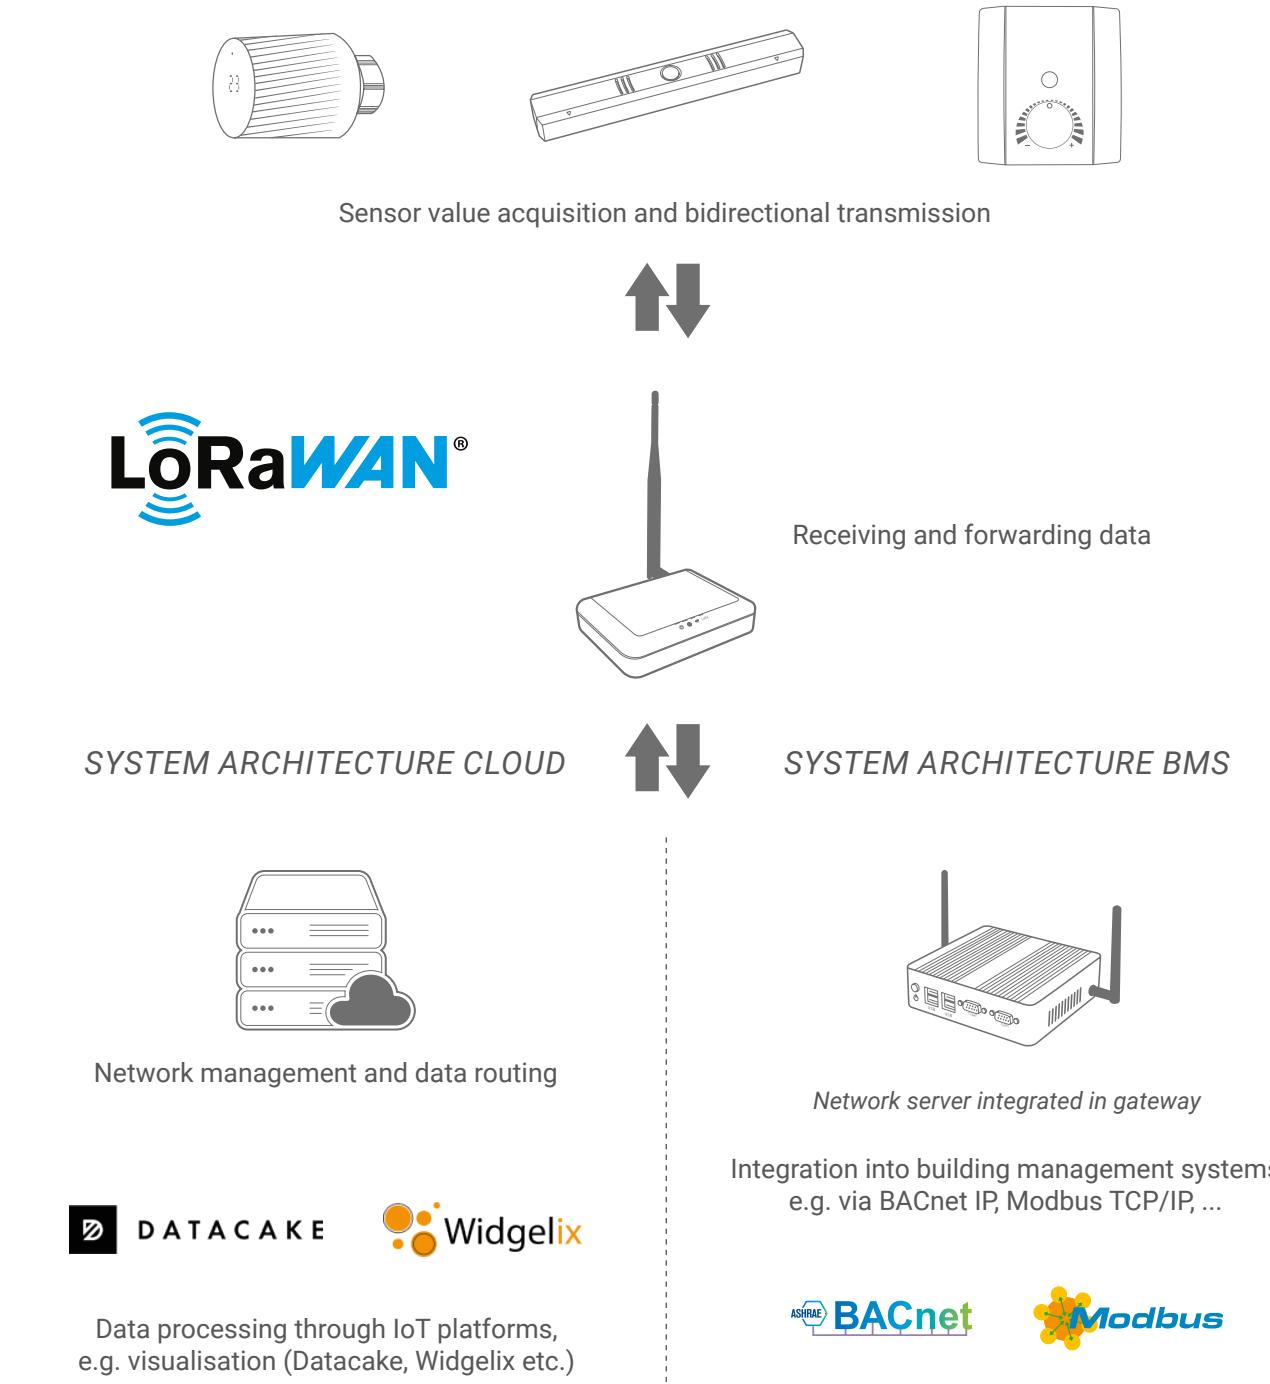



ADVANTAGES

- » Cost savings due to Energy Harvesting: Producing energy from the sensor environment
- » Flexibility with sensor location – quick and easy mounting and commissioning
- » Reduction of fire load – no need for wires
- » Easy integration into existing buildings – no wiring
- » High-end designs and direct mounting to all surfaces
- » Compatibility to other manufacturers: International Standard (IEC 14543-3-10)

» airConfig:
Convenient parameterisation of the devices using special remote commissioning commands

» airScan:
Field strength measuring system for evaluation and ideal placement of transmitters and receivers

EasySens®

The Self-Powered, Intelligent Wireless System



TRANSMITTERS

RECEIVERS (TRANSCEIVER)



TOOLBOX

INTEROPERABLE SYSTEM INTEGRATION





SR06 LCD

Stylish, compact, user-optimised – the self-powered room operating unit SR06 LCD enables a comfortable control of the room climate.

Besides displaying the actual room temperature it also allows for displaying the adjusted temperature setpoint and switching of lights and blinds (depending on the type).

» SmartACK



TECHNICAL HIGHLIGHTS

- » Energy self-powered thanks to Energy Harvesting Technology, no wiring and no batteries required
- » Indication of actual temperature and setpoint temperature as well as room occupancy by means of the integrated display
- » Adjustment of room temperature via function buttons
- » Integrated temperature and humidity sensor (optional)
- » Powerful energy storage system with very good energy balance
- » Customised configuration options with airConfig
- » Compatible with switch ranges of various manufacturers




MCS

NEW

The new MCS compact multi-sensors from Thermokon support the efficient automation of buildings. The small multi sensor can be mounted virtually everywhere and is connected through EnOcean or LoRaWAN® wireless with the Building Management System (BMS).

Barely 15 cm in length and only 1 cm high, the slim sensors are ideal for an inconspicuous mounting on ceilings, walls or work desks. The enclosure, which is identical to the wireless window contact SRW03, ensures a consistent and homogeneous design. Besides the standard colours white and anthracite, the sensors can be painted in multiple other colours to match the installation spots to be as inconspicuous as possible.

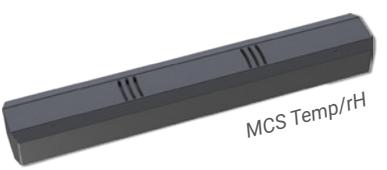

TECHNICAL HIGHLIGHTS

- » Variety of applications due to different types:
Occ – for detecting occupancy
Lum – for measuring luminosity
Temp/rH – for measuring temperature and humidity
Occ/Lum – for measuring occupancy and luminosity
- » Long-lasting battery lifetime (up to 10 years)
- » Flexible positioning by means of adhesive pads or screws
- » Standard colours: White, anthracite
- » High design flexibility: Custom painting on request



LoRaWAN®



ROOM OPERATING UNITS

For temperature/humidity detection and integrated operation of HVAC, lighting and blinds.



LIGHT AND MOTION

For detection of light and motion in rooms (ceiling or wall mounting) or in outdoor areas.



SWITCHES

For control of lights and blinds. Available in switch programmes of different manufacturers.



WINDOW- / DOOR CONTACTS

For status monitoring of windows and doors.



TEMPERATURE

Temperature sensors for various applications in buildings. (e.g. heating, refrigeration and air conditioning systems).



HUMIDITY

For measurement of rel. humidity in rooms, ducts and outdoor areas. Also available with a combined temperature sensor.



GATEWAYS

For easy connection to common BUS systems (including BACnet, KNX, LON, RS485 Modbus).



ACTUATORS

Radio-controlled valve actuators and receivers for converting electrical signals.






ADVANTAGES AND HIGHLIGHTS

- » High-resolution coloured display
- » Application-specific, exchangeable inserts and cable entries
- » Visualisation of device status and measured values using traffic light function (TLF)
- » Modular platform consisting of base and option PCBs

Removable cable entry and plug-in terminal for easy pre-assembly:

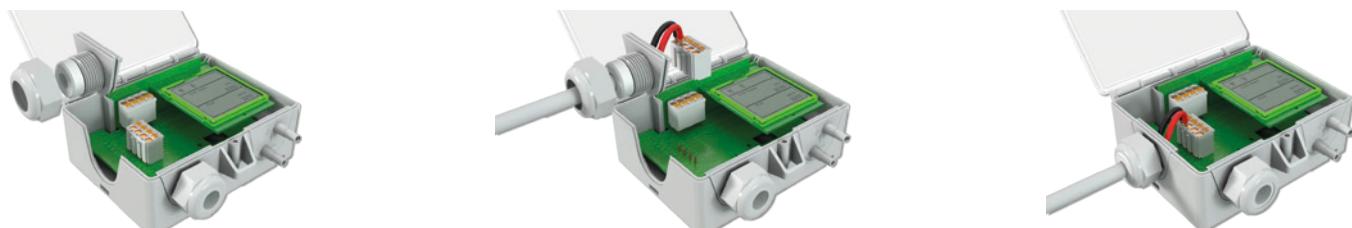

BACnet **LON** **Modbus**



- » Threshold switch relays
- » Live-zero-signal (e.g. 1..10 V)
- » Interfaces: BACnet, LON, Modbus
- » Output signals 0..10 V and 4..20 mA
- » Configuration via „USEapp“ (Thermokon® APP)

USEapp – FOR INDIVIDUAL CONFIGURATION

All „USEapp“ based products are supplied with a fully functional standard configuration.

Via the „USEapp“ it is possible to extend the range of use and to adapt the configuration individually to application requirements.

- » Communication via Bluetooth® Low-Energy-Module (BLE)
- » Individual configuration of output signals
- » Setting of different measuring ranges
- » Additional adjustment of offset values
- » Parameterisation of Live-Zero-Signal (1...10 V etc.)
- » Setting options for display indications
- » Customised parameterisation of traffic-light function
- » Setting of relay performance and thresholds
- » Modbus address offset (extension)
- » Possibility of firmware updates on-the-go (OTG)
- » Adjustment of maintenance intervals

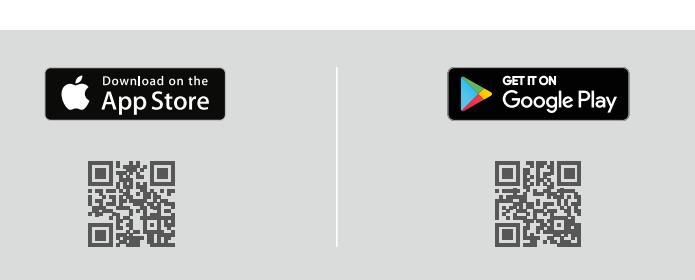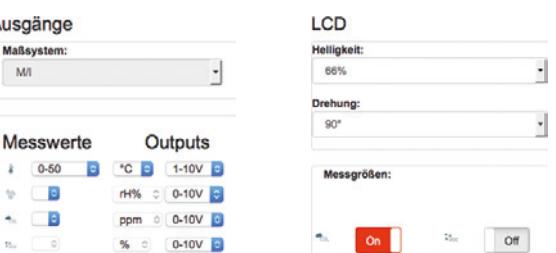



EUROPEAN CENTRAL BANK
FRANKFURT, GERMANY
MORE THAN 13.000 DEVICES




PRINCESS ELISABETH STATION
BELGIAN POLAR RESEARCH STATION,
QUEEN MAUD LAND, ANTARCTIC



INVESTMENT BANK SCHLESWIG-HOLSTEIN
KIEL, GERMANY



HAMAD INTERNATIONAL AIRPORT
DOHA, QATAR

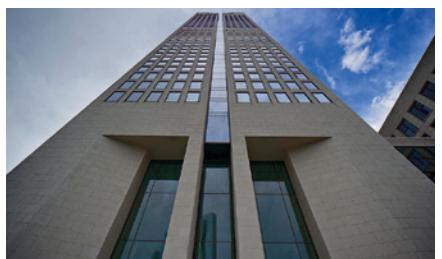

OPERA TOWER
FRANKFURT, GERMANY



STADE ROLAND GARROS
TENNIS STADIUM, PARIS, FRANCE



SHELL GLOBAL HEADQUARTERS
THE HAGUE, NETHERLANDS



SHEIKH ABDULLAH AL SALEM
CULTURAL CENTER, KUWAIT CITY



FAIRMONT HOTEL VIER JAHRESZEITEN
HAMBURG, GERMANY



UNIVERSITY OSLO
OSLO, NORWAY



PRIME TOWER
ZURICH, SWITZERLAND



TOMSON RIVIERA APARTMENT TOWERS
SHANGHAI, CHINA



FONDATION LOUIS VUITTON
PARIS, FRANCE



GENERALI INSURANCE HEADQUARTERS
TRIESTE, ITALY



STATE OPERA
VIENNA, AUSTRIA



KONICA MINOLTA
MILAN, ITALY

CONTACT

Thermokon Sensortechnik GmbH

Platanenweg 1 | 35756 Mittenaar | Germany
Phone: +49 2778 6960-0 | Fax: +49 2778 6960-400
email@thermokon.de | www.thermokon.de

AUSTRIA

Thermokon Elektronik Components GmbH

Ausstellungsstraße 6 | 2020 Hollabrunn
Phone: +43 2952 50407-0
info@thermokon.at | www.thermokon.at

FINLAND

Thermokon Sensor Technology Finland OY

Edelfeltinkatu | 48200 Kotka
Phone: +358 45 230 7141
info@thermokon.fi | www.thermokon.fi

FRANCE

Thermokon Sensor Technology France S.A.S.

38 Rue des Mathurins | 75008 Paris
Phone: +33 6 40 16 62 25
contact@thermokon.fr | www.thermokon.fr

ITALY

Thermokon Sensor Technology S.r.l.

Via XXV Aprile, 2/H | 20030 Senago (MI)
Phone: +39 347 9679018 | Fax: +49 2778 6960-400
contatti@thermokon.de | www.thermokon.com

CHINA

Thermokon Automation Equipment Co. Ltd.

479 Chun Dong Road | Xin Zhuang Industry Park,
Building C-1, 2/Floor | 201108 Shanghai
Phone: +86 21 5176 0211 | Fax: +86 21 5176 0213
info@thermokon.asia | www.thermokon.asia

NETHERLANDS

Thermokon Sensor Technology Nederland B.V.

Rosenstraat 11 | 6361 HS Nuth
Phone: +31 65 05 5 61 99
email@thermokon.nl | www.thermokon.nl

SPAIN

Thermokon Sensor Technology Ibérica S.L.U.

Agustín de Foxá, 4 – Edifizio Aqua | 28036 Madrid
Phone: +34 621 006 027
info@thermokon.es | www.thermokon.es

SWEDEN

Thermokon-Danelko Elektronik AB

Girovägen 13 | 17562 Järfälla
Phone: +46 10 212 10 30
info@thermokon.se | www.thermokon.se

SWITZERLAND

Thermokon Sensortechnik Schweiz AG

Zürichstraße 46 | 8303 Bassersdorf
Phone: +41 447 5250-00 | Fax: +41 447 5250-01
email@thermokon.ch | www.thermokon.ch

HONG KONG

Thermokon Sensor Technology Ltd.

Flat 6, 21/F, Lucida Industrial Building
43, Wang Lung Street | Tsuen Wan | Hong Kong
Phone: +852 3628 3760 | Fax: +852 3628 3762
info@thermokon.asia | www.thermokon.asia